


The Original. The Standard. The Future.



ST Weatherproof flood IP65 LED emergency self test
The Stanilite Flood, Smarter Than Ever.

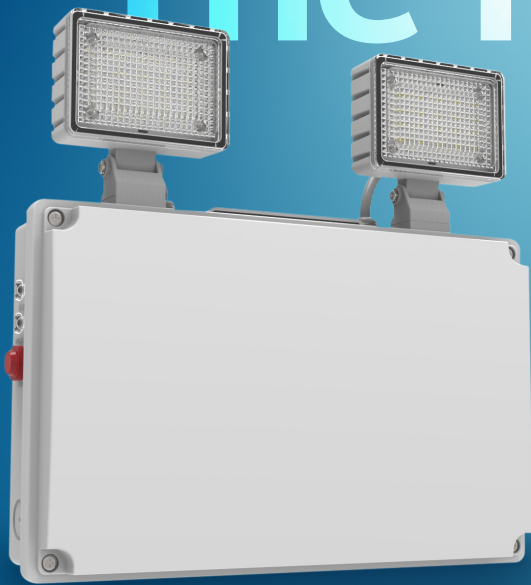

ST Quick multifix LED exit self test
One Exit, Five Solutions.
Smarter Safety.

ST Spitfire® Surface Mount Kit
Suitable for ST Spitfire®



ST Spitfire® LED self test
One spitfire, Two Lenses.
Smarter Safety.

Stanilite® ST Series

The ST series offers an affordable selection of self-test emergency fittings, each designed with unique features to provide smarter, and convenient emergency lighting solutions.

Stanilite®

Product Range



ST Weatherproof flood IP65 LED emergency self test

The Stanilite Flood, Smarter Than Ever.

The ST Weatherproof flood is built for performance under pressure. With a long life lithium iron phosphate battery and energy saving LED technology. Lightweight and weatherproof tough, it's smart emergency lighting with zero compromise.

Voltage	220-240V _{AC}
Mains frequency	50/60Hz
Mains power	3W max
Emergency power	0.7W
Commissioning test duration	120 min
Battery	LiFePO4 3.2V 1.5Ah
Discharge duration	90 min



ST Quick multifix LED exit self test

One Exit, Five Solutions. Smarter Safety.

The ST Quick multifix LED exit self test is engineered to outrun, combining self-testing intelligence with a 24m viewing range and energy-saving LED performance. Ceiling / Wall / Cantilever / Rod / Chain mounting ready. (Chain, Rod, and Cantilever kits sold separately)

Voltage	220-240V _{AC}
Mains frequency	50/60Hz
Mains power	3W max
Emergency power	0.7W
Commissioning test duration	120 min
Battery	LiFePO4 3.2V 1.5Ah
Discharge duration	90 min



ST Spitfire® LED self test

One spitfire, Two Lenses. Smarter Safety.

The ST Spitfire is a versatile emergency lighting solution featuring two interchangeable lenses that let you easily switch between corridor and open area coverage. With self-testing functionality, and a long-life lithium iron phosphate battery, it ensures reliable performance and quick installation.

Voltage	220-240V _{AC}
Mains frequency	50/60Hz
Mains power	2W max
Emergency power	2W
Commissioning test duration	120 min
Battery	LiFePO4 3.2V 3.3Ah
Discharge duration	90 min

Surface mount ready (kit sold separately).

Stanilite® ST Series

See more on our website

